


RGB LED Controller

Instructions

FEATURES

• 19 Dynamic Modes	• Card Type Remote
• 20 Static Colors	• Ultra Slim Design
• 256-Grade PWM	• Demo Mode
• Speed Adjustable	• 1 to 1 Remote Paired
• Brightness Adjustable	• Auto Save Function

FUNCTIONS



1, Turn On/Standby

Press this key to turn on unit or switch to standby mode. Unit will turn on and restore to previous status at powering on moment.

2/8, Dynamic Modes Adjust

Switch to dynamic mode from static color mode, or switch between dynamic modes.

3/9, Dynamic Speed Adjust

Adjust dynamic playing speed. Press Speed+ to increase speed and press Speed- to decrease speed Unit will switch to dynamic mode if press this key at static color mode.

4/5, Static Color Adjust

Switch to static color mode from dynamic mode, or switch between different static colors.


6/7, Brightness Adjust

Adjust static color brightness. Press Bright+ to increase brightness and press Bright- to decrease. Unit will switch to static color mode if press this key at dynamic mode.

10, Demo Mode

Press this key will switch to Demo mode. At demo mode, it will loop play 9 dynamic modes, each mode repeat 3 times.

INSTALLING

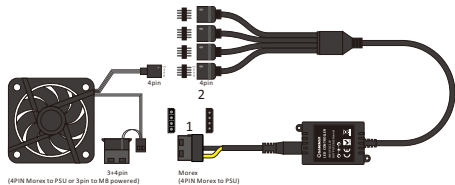

1, Power Supply

This unit accepts DC 12V/5V power supply. The inner pole polarity is positive and sleeve is negative. Please select proper power supply according to the LED application.

2, LED Output

This unit support common anode connection LED rods.

CAUTION! Do not short circuit the LED output, this may lead to permanent damage!

3, Remote Control

Please pull out the insulate part before using. The RF wireless remote signal can pass through barrier, so it's not necessary to aim at the main unit when operate. For proper receiving remote signal, do not install the main unit in closed metal parts. The remote battery is 3V, please only replace with same type battery.

INSTALLING

Dynamic Mode	19 Modes
Static Color	20 Colors
PWM Grade	256 levels
Brightness Grade	5 levels
Speed Grade	10 levels
Demo Grade	Yes
Working Voltage	DC 12V/5V
Output Plug	4-way
Remote distance	>30m at open area