




USER MANUAL

DARK RANGER


MFG.H605-TR

Specification


Color	Black
Left side pannel	Tempered Glass
M/B Type	MicroATX / ITX
Tool-less kit	2 sets of tool-less kit
HDD Drive Bay	3.5" HDD*2 / 2.5"SSD*2
Expansion Slots	4 Slots Support VGA card 330mm
Height of CPU	155mm
Cooling System	Rear: 120mm*1(Included)
	Top: 120mm*2(Optional)
Dust filter	Bottom dust filter*1,Top dust filter*1
I/O Panel	USB3.0x1, USB2.0x2
	HD Audio
Chassis Size	370(D)x188(W)x410(H)mm
Carton Size	435(D)x243(W)x477(H)mm




Front

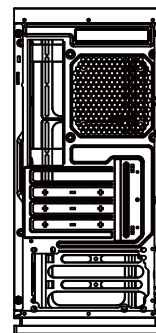


Back

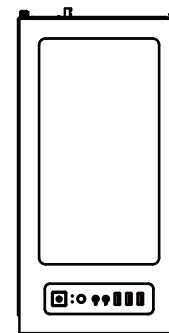


Top

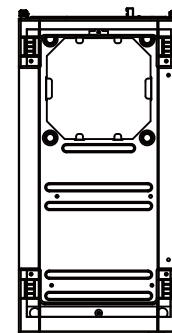

Bottom

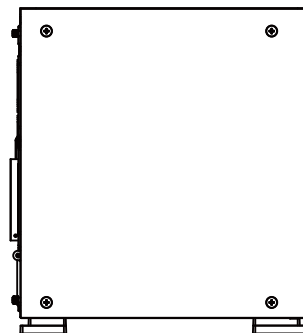

Left

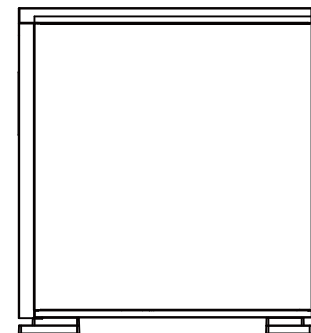

Right

1 Chassis

3 Tempered Glass panel


5 Foot

7 HDD tray

9 Top dust filter

11 Rear fan place

13 M/B place

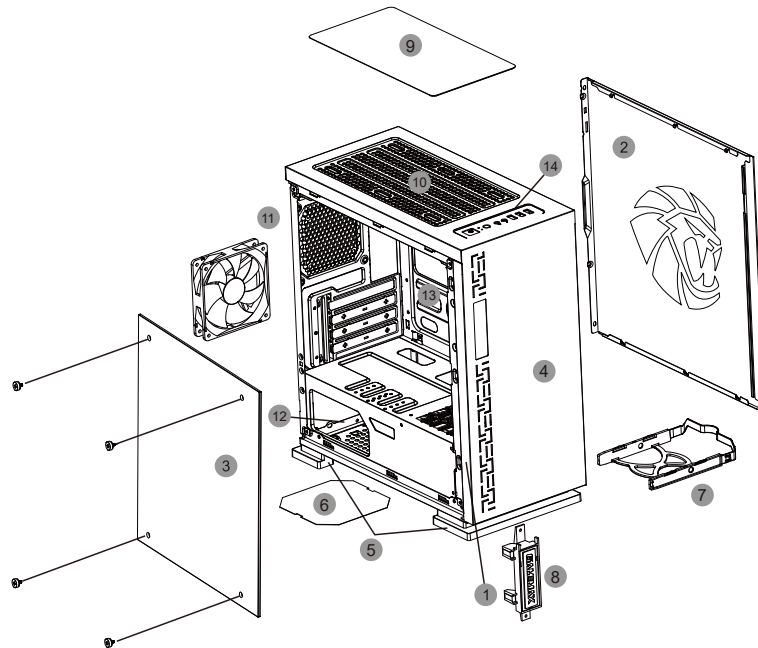

2 Right side panel

4 Front panel


6 Bottom dust filter

8 LOGO Nameplate

10 Top fan place


12 PSU place

14 I/O Panel

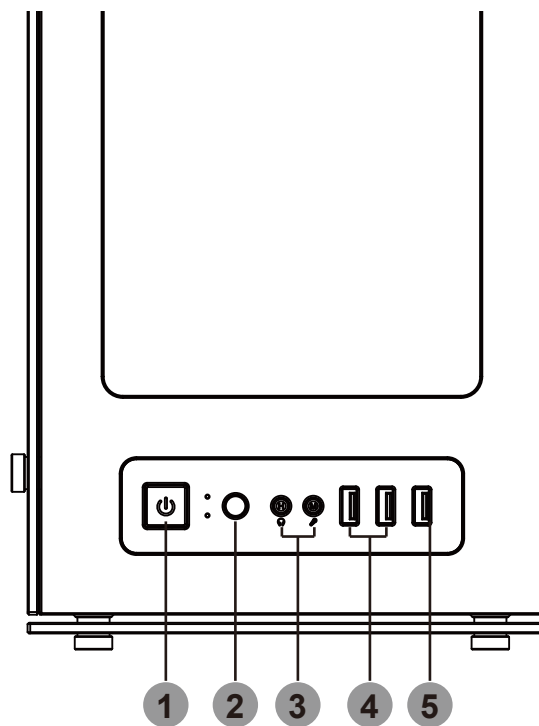


- 1 Power
- 2 Reset
- 3 HD Audio
- 4 USB 2.0
- 5 USB 3.0

◆ How to install PSU

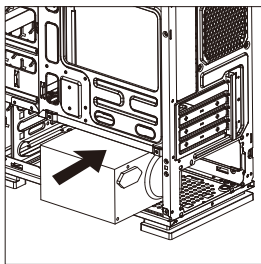


Install PSU

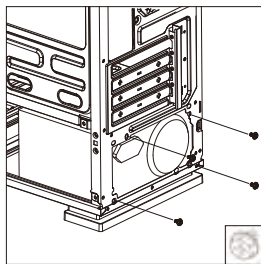


Fix with screws

◆ How to install M/B

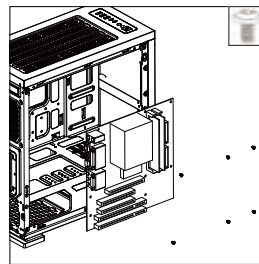


Install M/B


◆ How to install 2.5"SSD & 3.5" HDD

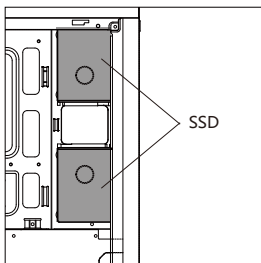

Insert the SSD into place

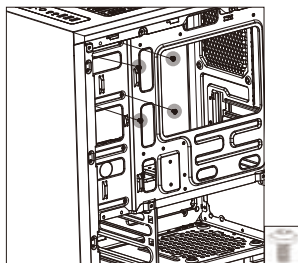


Tighten screws on the back to complete the installation

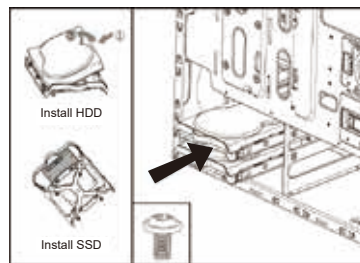

Insert the HDD into place


◆ How to install cooling system

Installation for top fan
Top: optional 2x fans

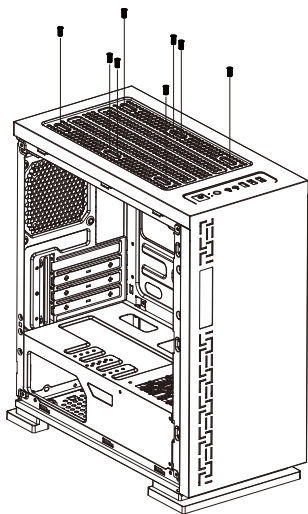


Top panel support 2x120mm fan,
put the fan in the top panel then
fix with screws.

Installation for rear fan
Rear: 1x fan pre-installed

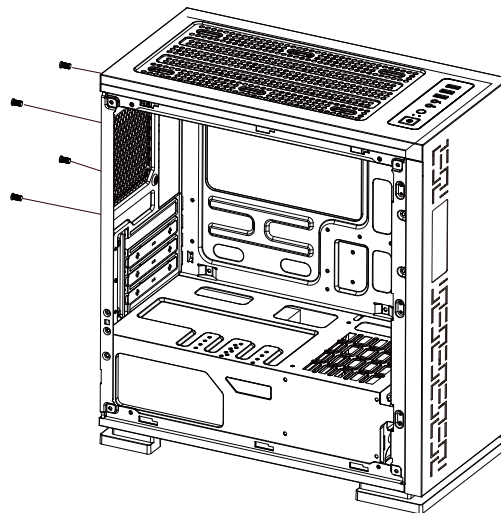

Rear panel support 1x120mm or 1x80mm
fan, put the fan in the rear panel then fix
with screws.

◆ How to install VGA card fix unit(Optional)

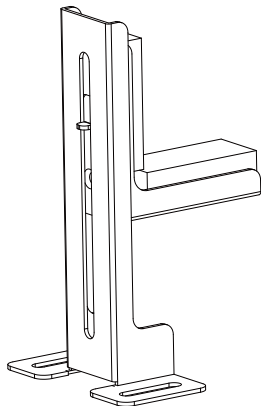

Adjustment Introduce:

- 1, Loosen the screw ①, adjust fix units A up and down.
- 2, Loosen the screw ② ③, adjust fix units B around.

